


STP285 - 24/Vd
STP280 - 24/Vd


SUNTECH
Solar powering a green future™


285 Watt


POLYCRYSTALLINE SOLAR MODULE


Features


- 

High module conversion efficiency (up to 14.7%), through superior manufacturing technology
- 


Guaranteed 0-5W positive power output tolerance ensures high reliability
- 

Anti-reflective, hydrophobic coating improves light absorption and reduces surface dust
- 

Excellent performance under low light environments (mornings, evenings and cloudy days)
- 

Entire module certified to withstand high wind loads (2400 Pascal) and snow loads (5400 Pascal) *
- 


4.0mm thick tempered glass improves module durability

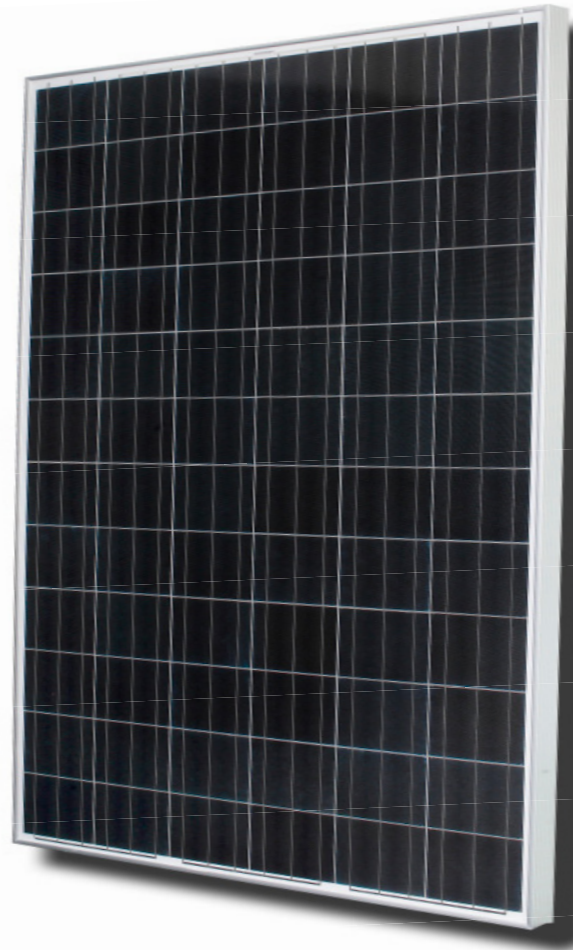

Trust Suntech to Deliver Reliable Performance Over Time

- World's leading manufacturer of crystalline silicon photovoltaic modules
- Unrivaled manufacturing capacity and world-class technology
- Rigorous quality control meeting the highest international standards : ISO 9001: 2008 and ISO 14001: 2004
- Certification and standards: IEC 61215, IEC 61730, conformity to CE

Industry-leading warranty

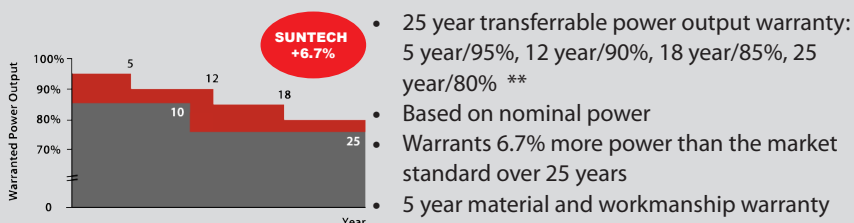


Suntech's reputation is founded on more than 1.5 gigawatts of high-performing solar modules installed around the world




Latest IP67 rated junction box improves module performance stability with enhanced thermal isolation.

* Please refer to Suntech Standard Module Installation Manual for details.
 ** Please refer to Suntech Product Warranty for details.

STP285 - 24/Vd
STP280 - 24/Vd

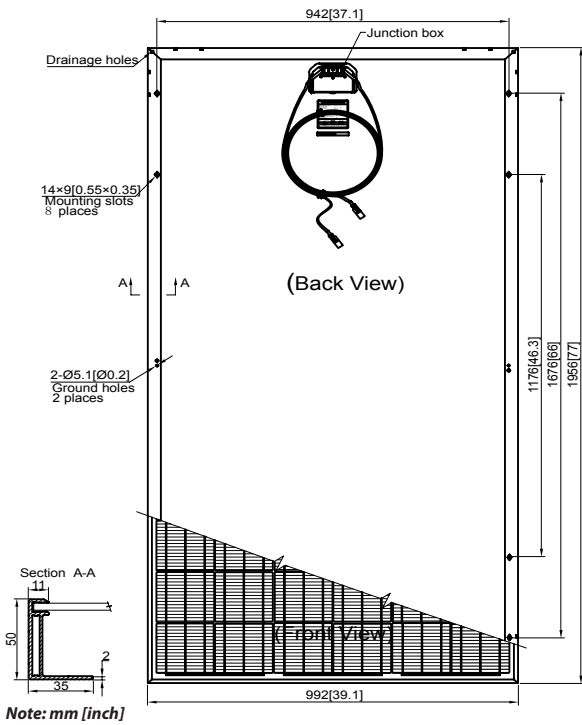

Current-Voltage & Power-Voltage Curve (280-24)

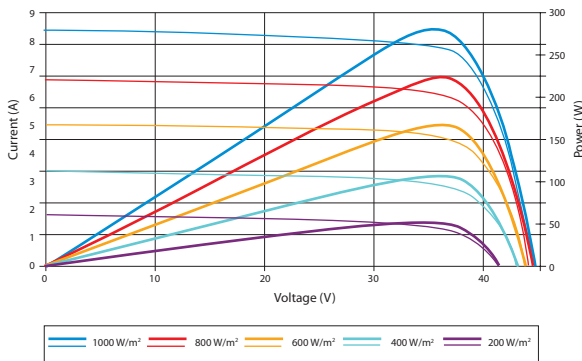

Temperature Characteristics

Nominal Operating Cell Temperature (NOCT)	45±2°C
Temperature Coefficient of Pmax	-0.47 %/°C
Temperature Coefficient of Voc	-0.34 %/°C
Temperature Coefficient of Isc	0.045 %/°C



Specifications are subject to change without further notification

Electrical Characteristics

STC	STP285-24/Vd	STP280-24/Vd
Optimum Operating Voltage (Vmp)	35.8 V	35.2 V
Optimum Operating Current (Imp)	7.95 A	7.95 A
Open - Circuit Voltage (Voc)	44.8 V	44.8 V
Short - Circuit Current (Isc)	8.37 A	8.33 A
Maximum Power at STC (Pmax)	285 W	280 W
Module Efficiency	14.7%	14.4%
Operating Temperature	-40 °C to +85 °C	-40 °C to +85 °C
Maximum System Voltage	1000 V DC	1000 V DC
Maximum Series Fuse Rating	20 A	20 A
Power Tolerance	0/+5 W	0/+5 W

STC: Irradiance 1000 W/m², module temperature 25 °C, AM=1.5

NOCT	STP285-24/Vd	STP280-24/Vd
Maximum Power (W)	208 W	204 W
Maximum Power Voltage (V)	32.2 V	32.0 V
Maximum Power Current (A)	6.45 A	6.39 A
Open Circuit Voltage (Voc)	41.2 V	40.8 V
Short Circuit Current (Isc)	6.78 A	6.74 A
Efficiency Reduction (from 1000 W/m ² to 200 W/m ²)	<4.5%	<4.5%

NOCT: Irradiance 800 W/m², ambient temperature 20 °C, wind speed 1 m/s

Mechanical Characteristics

Solar Cell	Polycrystalline 156 × 156 mm (6 inches)
No. of Cells	72 (6 × 12)
Dimensions	1956 × 992 × 50 mm (77.0 × 39.1 × 2.0 inches)
Weight	27 kgs (59.5 lbs.)
Front Glass	4.0 mm (0.16 inches) tempered glass
Frame	Anodized aluminium alloy
Junction Box	IP67 rated
Output Cables	H+S RADOX® SMART cable 4.0 mm ² (0.006 inches ²), symmetrical lengths (-) 1100 mm (43.3 inches) and (+) 1100 mm (43.3 inches), RADOX® SOLAR integrated twist locking connectors

Packing Configuration

Container	20' GP	40' GP	40' HC
Pieces per pallet	21	21	21
Pallets per container	6	12	24
Pieces per container	126	252	504